



### 3 SPRAYS



**Oxygenics**  
infuses oxygen into the water to create a dense and pressurized full body spray



**HydroFlood**  
thick streams of oxygenated water flow from multiple jets provide a soothing calm spray



**StreamFocus**  
small pressurized jet streams massage and stimulate

### SUSTAINABILITY

Oxygenics technology saves thousands of gallons of water per fixture per year in demanding commercial and residential environments. Conserving water and natural resources is one way to move towards sustainability. Using a water-conserving showerhead not only saves water, but it also saves energy.

## 3 Power Sprays – 3x the Performance

The multi-spray TriSpa harnesses the power of Oxygenics technology into three dynamic and pleasing sprays. The easy-twist face makes switching between the sprays effortless and the elegant styling adds the perfect touch of refinement to any shower. Designed to be eco-friendly, economical and save up to 70% in water and energy consumption compared to traditional shower fixtures.

### Pressure Boosting Technology

**Increases Your Pressure - Saves Water & Energy**

There is no other showerhead brand on the market that uses the patented core technology of Oxygenics showerheads and no other showerheads are able to deliver the same powerful pressurized results.

The innovative design injects air into the water stream as the accelerator fin increases the velocity of the outbound water. The result is a powerful full-body oxygenated spray that feels amazing and saves water and money at the same time.



### FEATURES

Water Saving



Money Saving



3 Sprays



Easy Install



Lifetime Warranty



60" Hose



### AVAILABLE FLOW RATES

2.5 GPM MAX

1.9 GPM MAX

### AVAILABLE STYLES

Fixed



Handheld



### AVAILABLE FINISHES

Chrome



Brushed Nickel



Gold



Oil Rubbed Bronze



# oxygenics® TriSpa™

## FIXED

MODEL	FINISH	MAX FLOW RATE
80210	Chrome	1.9
80220	Chrome	2.5
82210	Brushed Nickel	1.9
82220	Brushed Nickel	2.5
83210	Gold	1.9
83220	Gold	2.5
84210	Oil Rubbed Bronze	1.9
84220	Oil Rubbed Bronze	2.5

**Includes:** Teflon Tape, Installation Instructions

## HANDHELD

MODEL	FINISH	MAX FLOW RATE
80227	Chrome	2.5
82227	Brushed Nickel	2.5
84227	Oil Rubbed Bronze	2.5

**Includes:** (1) Wand, (1) 60" Hose, (1) Holder, Teflon Tape, Installation Instructions

## FEATURES & BENEFITS

### Pressure Increasing Technology

Increased water velocity + air induction = MORE PRESSURE. The patented technology ensures an invigorating pressurized shower spray regardless of water pressure.

### Three Power Sprays

Each of the three pressurized sprays provides an invigorating and pleasurable shower experience that will provide just the right spray for every mood or application.

### Easy Twist Face

Switching between the sprays is effortless. With a simple twist of the face the sprays transition seamlessly into one another for the ultimate shower experience.

### Eco-Friendly and Economical

Oxygenics uses 20-70% less water compared to industry leading brands. Thousands of gallons of water can be saved each year which means significant energy and money savings.

### No Clogging – Zero Maintenance

The internal components are made of Delrin® - a material similar to Teflon® which increases durability and eliminates clogging, mineral build-up and corrosion. No cleaning required - install it and forget it!

### Guaranteed For Life

The Oxygenics TriSpa comes with a lifetime performance warranty against clogging. It's guaranteed not to clog - EVER.

The Oxygenics TriSpa Series meets ANSI standard testing and materials specifications A112.18.1M-1996.

Designed to function appropriately at pressures no less than 20 psi. Constructed to withstand pressures of 150 psi and temperatures up to 160° F.

The internal components are constructed of injection molded Delrin acetal. The pieces are machine pressed into the base and cannot be removed with a straight pushing or pulling force of less than 100 lbs.

The cores are constructed of Delrin acetal resin. Each core spray uses a venturi system consisting of 16 air entrance ports, which allow air to increase the spray velocity. Oxygen levels in the water are increased as well. Anti scale rubber is used for the Stream Focus™ spray of the TriSpa. To maintain optimal performance, simply rub the rubber spray tips with a finger to eliminate any buildup.


The showerhead face and outer shell is made of plated ABS plastic enhancing the showerhead's appearance and muffling the spray functions.

The wand holder and fixed base utilizes a ball and socket allowing for adjustment. Ball is constructed with Delrin acetal. The seating washer is designed to seal around the ball swivel when compressed by assembly. On fixed models the base connector is made from free machining aluminum and CBA alloy. Bases fit any standard 1/2" male threaded shower arm.

The 60" hose and holder are constructed of ABS plastic, aluminum, and zinc. Both are designed to withstand pressures of up to 100 psi.

Lifetime warranted against clogging and defective material and workmanship.

## WATER SAVINGS COMPARISON

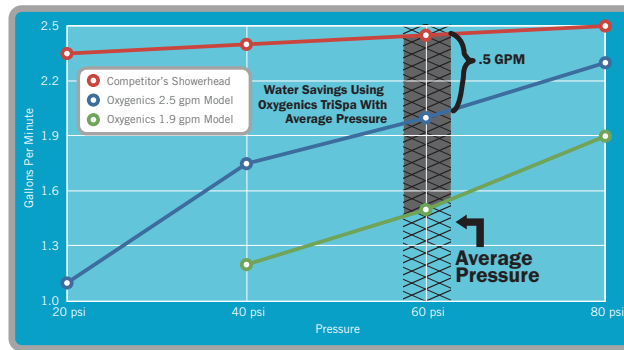

Flow restrictors have been placed in showerheads by manufacturers as a way to keep water usage at 2.5 GPM since it was mandated by the U.S. Government in 1992. This method of water restriction significantly decreases water pressure creating unsatisfactory shower performance. Oxygenics showerheads contain no removable restrictors and adapt to the incoming water pressure to use only what is necessary while still providing an extremely enjoyable and pressurized shower which saves a significant amount of water, energy and money.

While other industry-standard showerheads flow at 2.5 GPM at 60 PSI (national water pressure average), the Oxygenics TriSpa flows at 2.0 GPM at 60 PSI, offering 20% water savings. Not only is this savings significant in reducing water, but it also reduces energy costs as less hot water is used.

As illustrated in the chart above, Oxygenics showerheads adapt to the incoming water pressure, so as the pressure decreases, more water and energy savings can be expected compared to industry-standard showerheads that have a constant flow of 2.5 GPM. In some cases, as much as 70% water and energy can be saved by using Oxygenics showerheads. Save even more water and energy with the 1.9 GPM model.

## PRODUCT SPECS

### Product dimensions:

Fixed - 4.5" x 4.5" x 5.75"  
Handheld - 7" x 5" x 4.25"

### Individual product weight:

Fixed - 1 lbs.  
Handheld - 2 lbs.

## PACKAGING SPECS

### Package dimensions:

Fixed Box - 4.5" x 4.5" x 5.75"  
Fixed Clamshell - 7.75" x 7.375" x 4.5"  
Handheld Box - 4.5" x 4.5" x 10.25"  
Handheld Clamshell - 12.5" x 7" x 4.75"

### Case quantity (24 units):

Fixed Box - 12 units / ctn.  
Fixed Clamshell - 6 units / ctn.  
Handheld Box - 12 units / ctn.  
Handheld Clamshell - 4 units / ctn.

### Case weight (28 lbs. / 32 lbs. / 54 lbs. / 60 lbs.):

Fixed Box - 12 lbs. (14 lbs. / ctn.)  
Fixed Clamshell - 6 lbs. (8 lbs. / ctn.)  
Handheld Box - 24 lbs. (26 lbs. / ctn.)  
Handheld Clamshell - 8 lbs. (10 lbs. / ctn.)

